
1N5400 - 1N5408

3.0A RECTIFIER

SPICE MODELS: 1N5400 1N5401 1N5402 1N5404 1N5406 1N5407 1N5408

Features

- Diffused Junction
- High Current Capability and Low Forward Voltage Drop
- Surge Overload Rating to 200A Peak
- Low Reverse Leakage Current
- Plastic Material: UL Flammability Classification Rating 94V-0

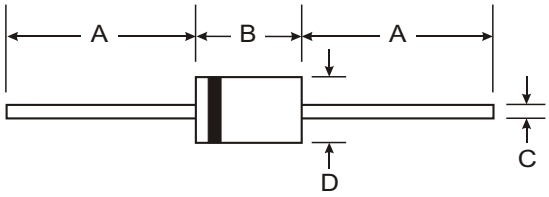

Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 1.1 grams (approx.)
- Mounting Position: Any
- Marking: Type Number

DO-201AD		
Dim	**Min**	**Max**
A	25.40	—
B	7.20	9.50
C	1.20	1.30
D	4.80	5.30
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	1N 5400	1N 5401	1N 5402	1N 5404	1N 5406	1N 5407	1N 5408	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	200	400	600	800	1000	V
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	280	420	560	700	V
Average Rectified Output Current @ T_A = 105°C (Note 1)	I_O	3.0							A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	200							A
Forward Voltage @ I_F = 3.0A	V_{FM}	1.0							V
Peak Reverse Current @ T_A = 25°C at Rated DC Blocking Voltage @ T_A = 150°C	I_{RM}	10 100							μA
Typical Junction Capacitance (Note 2)	C_j	50				25			pF
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	15							K/W
Operating and Storage Temperature Range	T_j, T_{STG}	-65 to +150							°C

Notes: 1. Valid provided that leads are kept at ambient temperature at a distance of 9.5mm from the case.
2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

© Diodes Incorporated

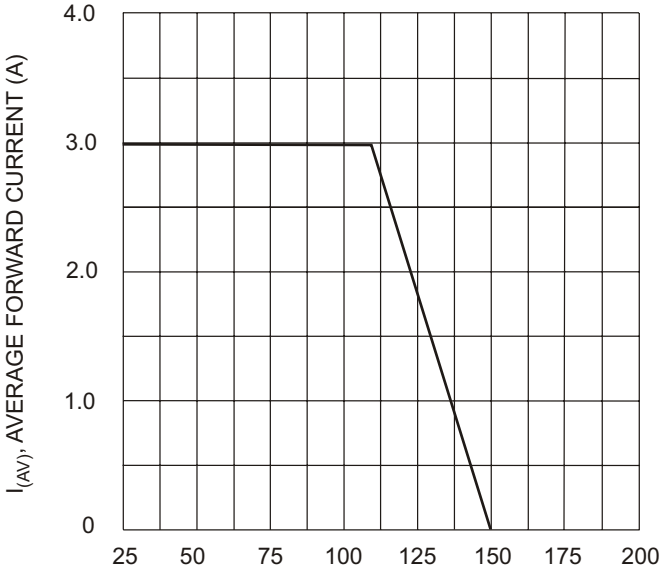


Fig. 1 Forward Current Derating Curve

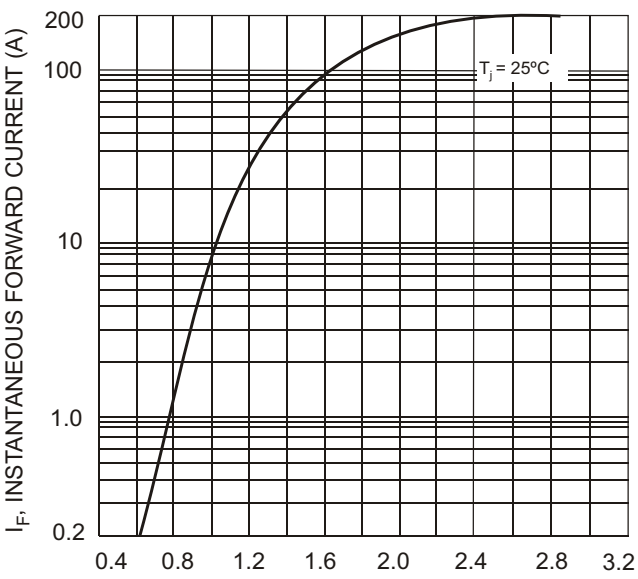


Fig. 2 Typical Forward Characteristics

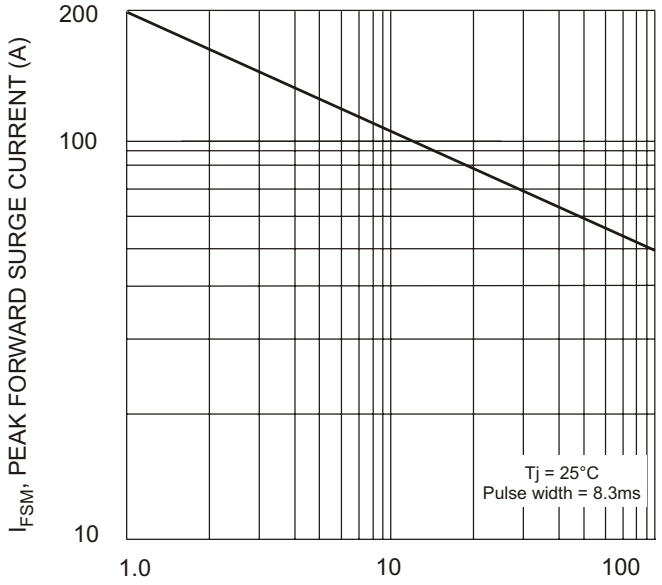


Fig. 3 Maximum Non-Repetitive Surge Current

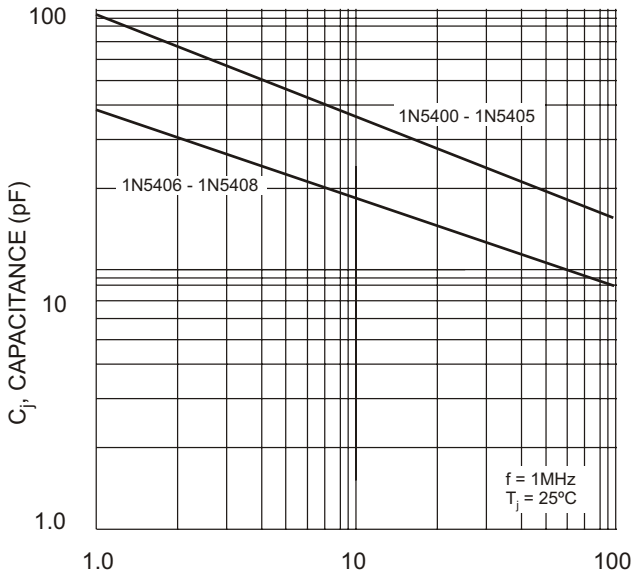


Fig. 4 Typical Junction Capacitance